


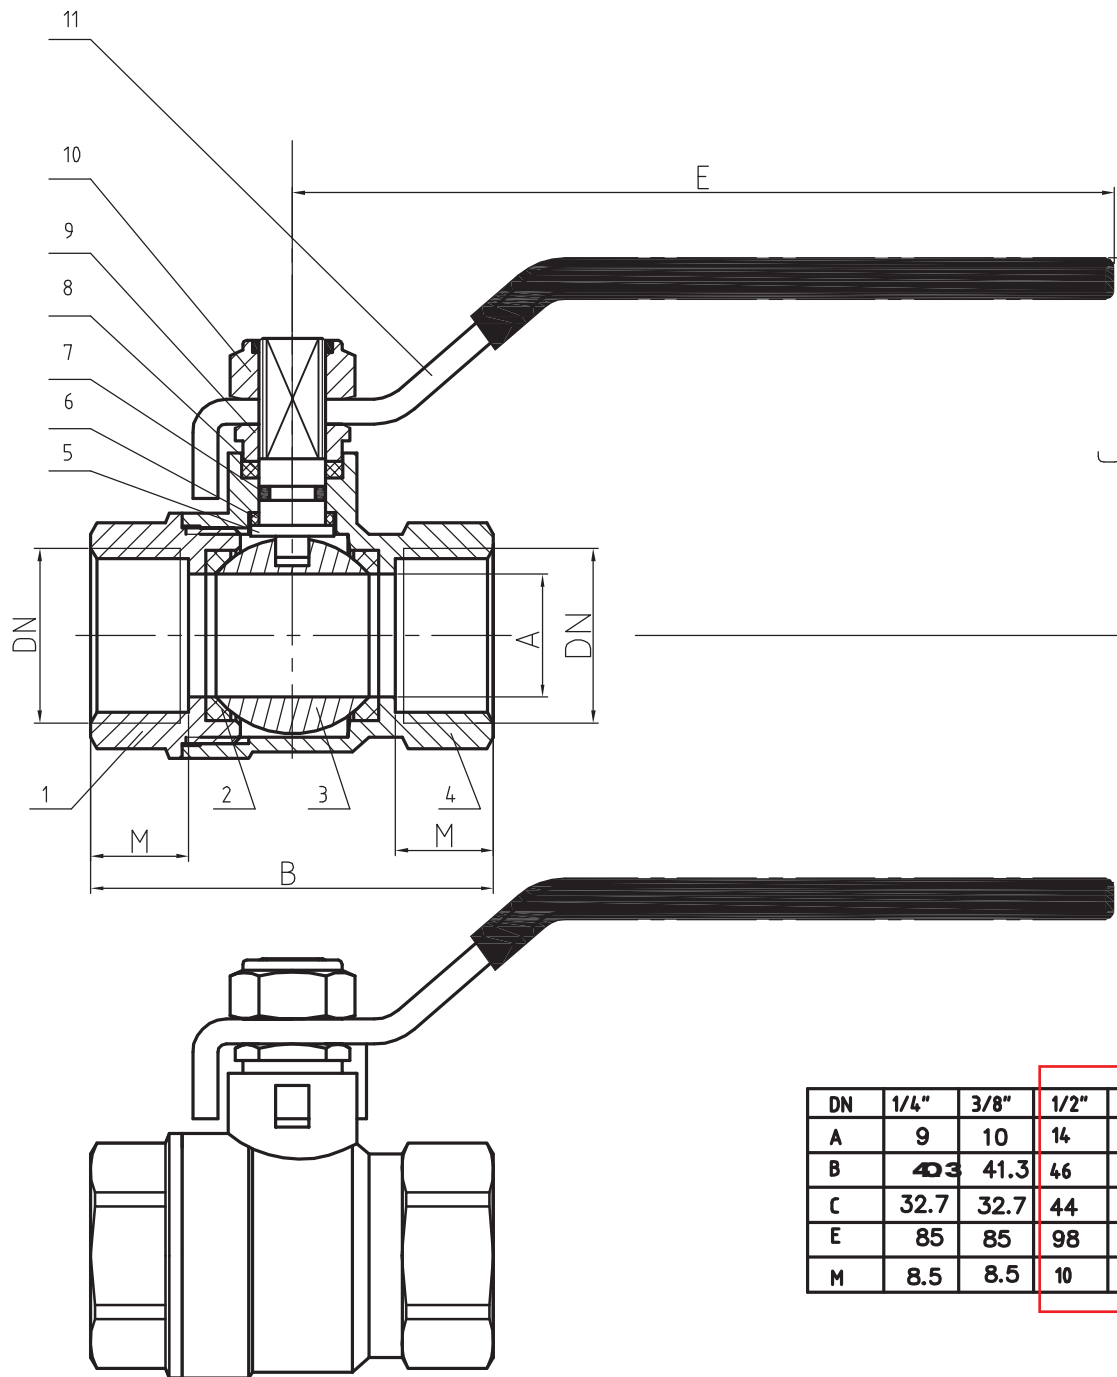

ART.1030 F/F S
BRASS BALL VALVE
Full Bore
Threaded F/F ISO228
Temperature:min -20°C
max+95°C
Nominal pressure:Max 25bar

SIZE:1/4"—4"

NO	COMPONENT	MATERIAL
1	valve nut	brass
2	seal ring	P.T.F.E
3	ball	brass
4	body	brass
5	stem	brass
6	down-filling	P.T.F.E
7	o-rings	NBR 70°
8	up-filling	P.T.F.E
9	press nut	brass
10	nut	steel
11	handLe	steel

DN	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
A	9	10	14	19	24	30.2	37	47	62	74	90
B	40.3	41.3	46	53	64	76	88	99	132	152.4	179
C	32.7	32.7	44	48	57.3	69	74.5	84.5	115.5	124	135.5
E	85	85	98	98	125	142	142	165	225	225	225
M	8.5	8.5	10	10.5	13.5	15	16.5	16.5	24	26.5	29.5