


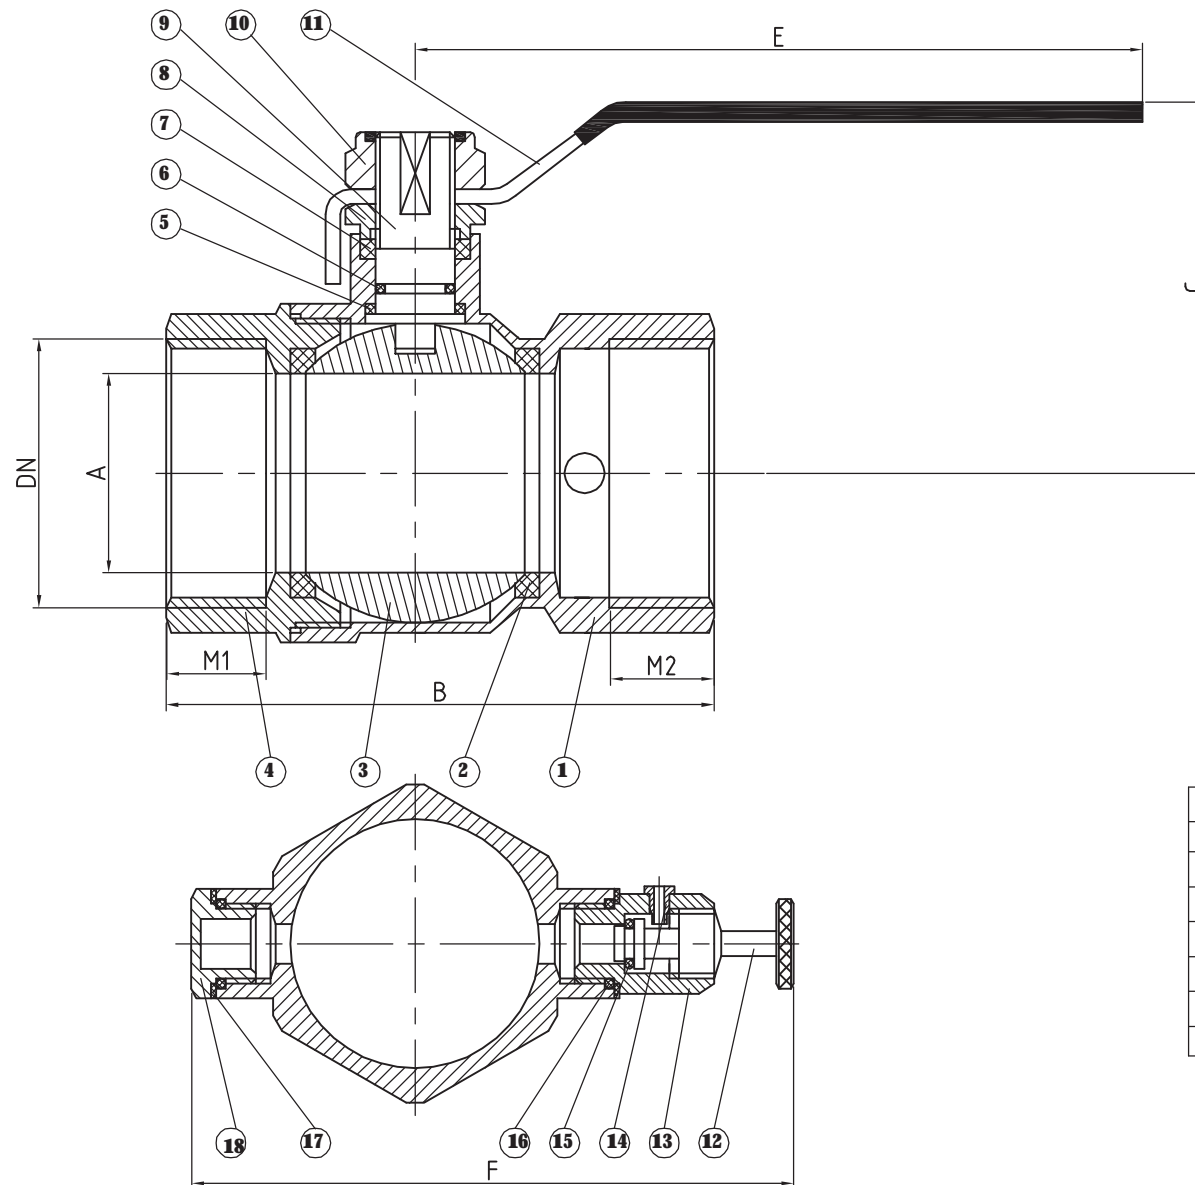

ART.1034 FXF S

brass ball valve with drain off-cock

full bore

threaded f/f iso228/1

temperature : min -30° max +95°

nominal pressure: max 25bar

available: in all sizes from 1/2 up to 2"

Nb	description	material
1	body	brass
2	seal ring	P.T.F.E
3	ball	brass
4	valve nut	brass
5	drain filling	P.T.F.E
6	oring	NBR
7	up filling	P.T.F.E
8	pressure nut	brass
9	stem	brass
10	nut	steel
11	handle	steel
12	nozzle core	brass
13	nozzle body	brass
14	nozzle end	brass
15	O-ring	NBR
16	O-ring	NBR
17	hard paper gasket	
18	nut for nozzle	brass

DN	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
A	14	19	24	30.2	37	47
B	53.5	60	69.5	82	92	104.5
C	44	48	57.3	69	74.5	84.5
E	98	98	125	142	142	165
M1	10	10.5	13	15	15.5	16
M2	10	10.5	13.5	15	16.5	16.5
F	103	110	115	123	128	140