

SPECIFICATION SHEET

TEHNIČKI LIST




COLLECTION
SERIJA

STOLZ

PRODUCT CODE
ŠIFRA PROIZVODA

1661212

1661238

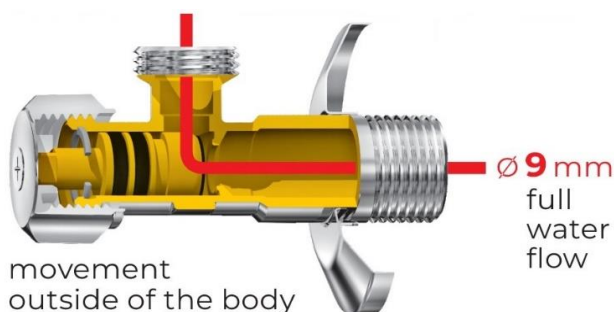

KARAKTERISTIKE

Ulaz vode velikog promjera (9 mm)
Otvor za vodu velikog promjera (9 mm)
Puni otvor za puni protok (6 mm)
Dvostruki O-prsten velikog promjera za sigurno brtvljenje
s komorom za mast koja omogućuje produljeni radni vijek
Pokretni mehanizam nije unutar nego izvan kućišta
samog ventila, sprječava otežano kretanje

Svi materijali u spremniku za vodu su CW617N mesing
NBR gumene brtve za kontakt s hranom / FDA177.2600

RADNI USLOVI

Maksimalni radni tlak: 10 bar
Preporučeni radni ptlak: 3 bar
Maksimalna dozvoljena temperatura: 70°C
Preporučena temperatura vode: 50°C

CHARACTERISTICS

Large diameter water inlet (9mm)
Large diameter water outlet (9mm)
High opening stroke for optima water flow (6mm)
Double OR with considerable size that forms a lubricated
sealed chamber which ensures longer life
Opening and closing movement is not in, but outside of
the water to avoid stiff operation due to lime scale

All parts in contact with water are made of brass CW617N
All seals made of NBR for food use / FD177.2600

WORKING CONDITIONS

Max. working pressure : 10 bar
Suggested working pressure : 3 bar
Max. working temperature : 70°C
Suggested max. water temperature : 50°C