# Infrared urinal flushing valve SLP 02KBX including frame SLR 22 SLP 03KBX

SANELA we make water cool®



SMART FLOW


A 1 l/flush.
B
C
D
E

WATER EFFICIENCY

## Characteristics

- **includes Bluetooth control (paid Sanela Control app for download)**
- **including mounting frame SLR 22**
- frame designed for plasterboard structures, for anchoring to the floor and to the rear wall
- metal frame structure with blue surface finish powder coating
- mounting screws M10 and M8, waste holder with elbow Ø 50 mm and water inlet G 1/2"
- responds to the presence of a person in front of the urinal at a distance max 0.7 m from the sensor for longer than 7.5 s
- flushing occurs after the person leaves the detected zone
- flush time is adjustable from 0.5 to 15.5 s
- parameter settings and communication with the electronics via Sanela Control app (Bluetooth) or the SLD 03
- automatic flushing 24 hours after the last valve activation
- battery status monitoring
- possibility to regulate water flow with a ball valve
- brushed finish
- the product meets the water consumption parameters for class 1 according to the criteria of the EU Water Label program

## Installation Drawing

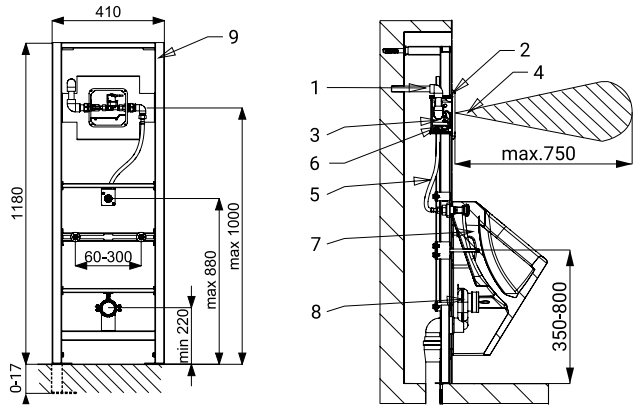


1 - water supply
2 - stainless steel cover with electronics
3 - plastic mounting box with ball and solenoid valve
4 - sensing area
5 - outlet to urinal
6 - battery case
7 - urinal
8 - siphon
9 - mounting frame SLR 22

## Technical Specification

| | |
|---|---|
| **Stainless steel cover dimensions** | 170 x 170 x 10 mm |
| **Mounting box dimensions** | 140 x 140 x 75 mm |
| **Frame dimensions** | 1120 - 1290 x 410 x 155 - 235 mm |
| **Supply voltage** | 6 V |
| **Power input** | 3 W |
| **Range** | 0,6 - 0,75 m |
| **Recommended working pressure** | 0.1 - 0.6 MPa |
| **Flow rate** | 18 l/min (informative value) |
| **Water inlet** | external thread G 3/4" |
| **Water outlet** | outlet fitting with gasket |

## Supply specification

**SLP 03KBX - Supply No. 11032** stainless steel cover with electronics including Bluetooth module, plastic installation box with union, solenoid valve and ball valve, 4 pcs AA alkaline 1.5 V 2700 mAh batteries, connecting flexible hose, outlet fitting with gasket, mounting frame SLR 22

***Automatic urinal flush valves***

## Recommended accessories

| | | |
|---|---|---|
| **SLD 03** | **- Supply No. 07030** | remote control for an adjustment of parameters |
| **SLA 36** | **- Supply No. 06360** | set of 4 AA alkaline batteries, 1.5 V, 2700 mAh |
| **SANELA CONTROL APP** | | paid Sanela Control app available for download on the App Store and Google Play |