


Stainless Steel Automatic Urinal Troughs SLPN 02E, SLPN 03E, SLPN 04E, SLPN 05E



SLPN 02E

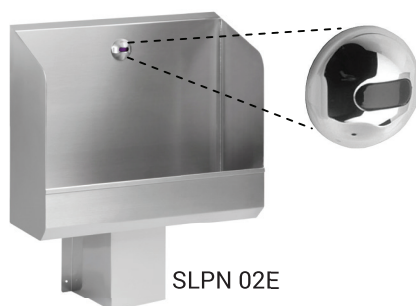


SLPN 05E

Characteristics

- **vandal-proof**
- stainless steel wall hung urinal trough with integrated infra-red electronics
- every flushing unit reacts independently to the user attendance in front of the urinal at a maximum distance max. 0,7 m, minimum stay time in active range is 7,5 s
- adjustable flushing time 0,5 - 15,5 s
- parameters adjustment by remote control SLD 03
- automatic hygiene flushing after 24 hours non-use
- different lengths could be made to order
- material AISI - 304
- brushed finish

Dimensions

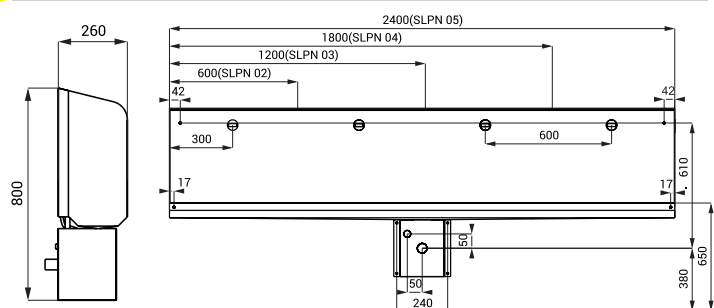

Technical Specification

Operating voltage	24 V DC
Power input	
▪ SLPN 02E	7 W
▪ SLPN 03E	14 W
▪ SLPN 04E	21 W
▪ SLPN 05E	28 W
Active range	0,6 - 0,75 m
Recommended flow pressure	0,1 - 0,6 MPa
Rate of flow	12 l/min. by the pressure 0,3 MPa for 1 flushing head (inf. data)
Water inlet	male thread G 1/2"

* for the height of the front edge of the urinal 650 mm above the floor

Supply Specification

SLPN 02E - Supply No. 91021	stainless steel urinal trough 600 mm with flushing head and electronics (1 pc.), electromagnetic valve (1 pc.), angle valve with a filter, connecting hoses, mounting set, cover for siphon, siphon
SLPN 03E - Supply No. 91031	stainless steel urinal trough 1200 mm with flushing head and electronics (2 pcs.), electromagnetic valve (2 pcs.), angle valve with a filter, mounting set, cover for siphon, siphon
SLPN 04E - Supply No. 91041	stainless steel urinal trough 1800 mm with flushing head and electronics (3 pcs.), electromagnetic valve (3 pcs.), angle valve with a filter, mounting set, cover for siphon, siphon
SLPN 05E - Supply No. 91051	stainless steel urinal trough 2400 mm with flushing head and electronics (4 pcs.), electromagnetic valve (4 pcs.), angle valve with a filter, mounting set, cover for siphon, siphon

Recommended Accessories

SLZ 01Y - Supply No. 05012	power supply 24 V DC for operating of max. 5 pcs. of electromagnetic valves
SLZ 01Z - Supply No. 05011	power supply 24 V DC for operating of max. 9 pcs. of electromagnetic valves
SLZ 04Y - Supply No. 05042	power supply 24 V DC on DIN rail, for operating of max. 5 pcs. of electromagnetic valves
SLZ 04Z - Supply No. 05041	power supply 24 V DC on DIN rail, for operating of max. 9 pcs. of electromagnetic valves
SLZ 04X - Supply No. 10049	power supply 24 V DC on DIN rail, for operating of max. 15 pcs. of electromagnetic valves
SLZ 06 - Supply No. 05012	power supply 24 V DC for operating of max. 1 pc. of electromagnetic valve
SLD 03 - Supply No. 07030	remote control for an adjustment of parameters