

Vandal-proof Combination Units SLWN 18P, SLWN 18L



SLWN 18P


Characteristics




- vandal-proof
- suitable for prison
- corner combination with toilet, washbasin and washbasin spout
- push button washbasin spout
- push button for toilet flushing
- SLWN 18P - floor standing toilet on the right side
- SLWN 18L - floor standing toilet on the left side
- filled with expanded polyurethane (to avoid dents and typical metal noise)
- rear assembling through the service hatch
- material stainless steel AISI 304 (1.4301)
- brushed finish

Dimensions

SLWN 18P/L

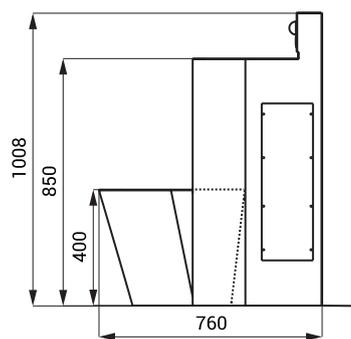

CELL




Technical Specification

| | |
|----------------------------------|---|
| Dimensions | 1008 x 760 x 680 mm |
| Weight | 34 kg |
| Recommended flow pressure | 0,15 - 0,5 MPa |
| Rate of flow | 70 l/min. by the pressure 0,15 MPa (inf. data) |
| Water inlet | |
| ▪ WC | Ø min. 32 mm (PN 16) |
| | male thread G 3/4" |
| ▪ washbasin | male thread G 1/2" |

- 1 - push button for washbasin - male thread G 1/2"
- 2 - washbasin spout
- 3 - waste outlet pipe from the washbasin - male thread G 6/4"
- 4 - push button for toilet - male thread G 3/4"
- 5 - toilet flushing valve
- 6 - waste outlet connection from toilet (Ø 101,6 mm)
- 7 - filled with expanded polyurethane

SLWN 18L



SLWN 18P

Supply Specification

| | |
|------------------------------------|---|
| SLWN 18P - Supply No. 94182 | stainless steel combination unit with toilet and washbasin, push button (2 pcs.), |
| SLWN 18L - Supply No. 94181 | washbasin spout, mounting set, set for connection |